


- 铝合金材质, IP65防护等级
- 认证精度可达 6 000d OIML R60 和5 000d NTEP
- 偏载补偿可达 400x400mm
- 专为单点式称重或配料/定量设备设计
- *Aluminium construction, protection class IP65*
- *Approved up to 6 000 d OIML R60 and 5 000 d NTEP*
- *Off-centered loads compensated up to 400x400 mm*
- *Ideal for single point scales or batching/dosing machines*

接线 Wiring

+ 激励	+ 信号	- 信号	- 激励	+ 参考	- 参考
+ excit.	+ signal	- signal	- excit.	+ sense	- sense
棕	黄	白	绿	灰	粉
brown	yellow	white	green	grey	pink

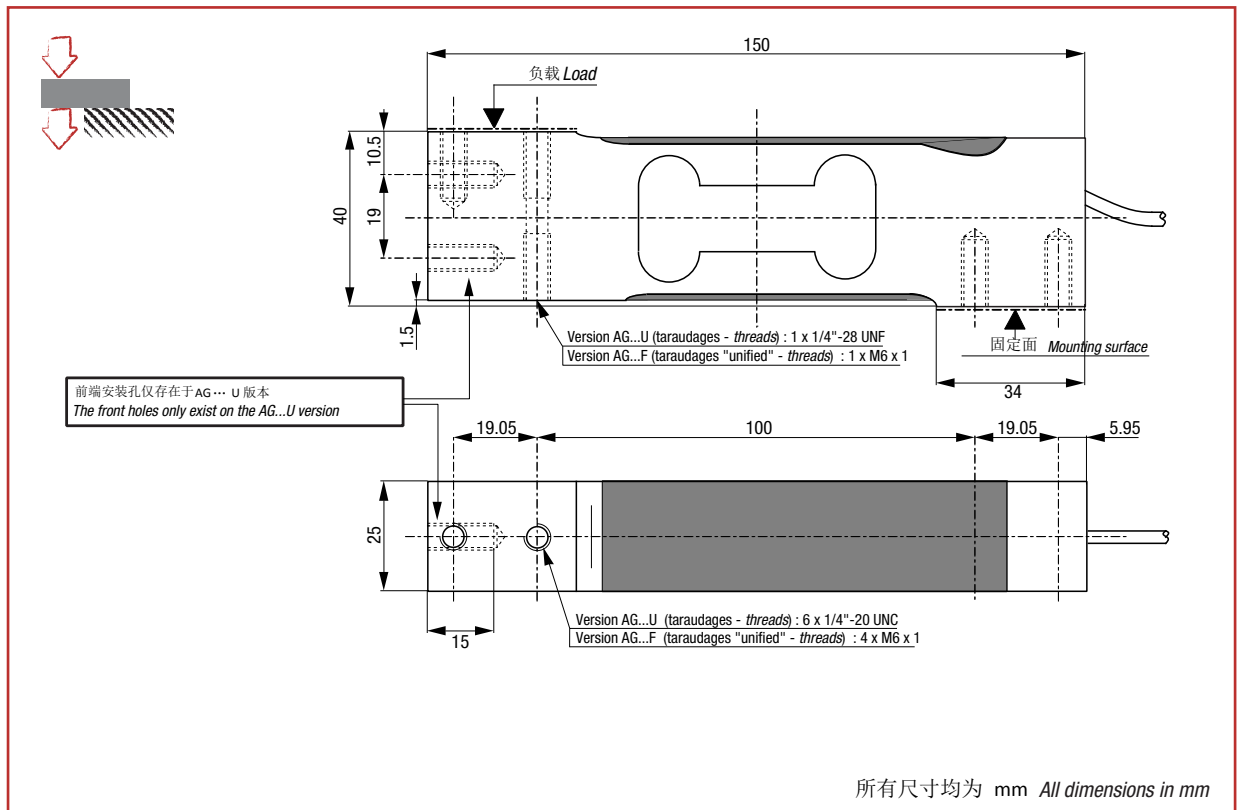

技术参数

Specifications

计量特性	METROLOGICAL	C3 5e	C3 10e	
额定载荷	Rated capacity (C_n)	5, 10, 15, 20, 30, 50, 75, 100	10, 15, 20, 30, 50, 75, 100	kg
综合精度	Combined error	±0.017	±0.017	% C_n
温度对零度输出的影响	Temperature effect on zero	±0.0028	±0.0014	% $C_n/°C$
温度对输出灵敏度的影响	Temperature effect on sensitivity	±0.0014	±0.0014	% $C_n/°C$
蠕变 (30 分钟)	Creep error (30 min.)	±0.024	±0.024	% C_n
零点平衡	Zero balance	±10	±10	% C_n
最大台面尺寸	Maximum platform size	400x400	400x400	mm
OIML R60 法定计量参数		LEGAL METROLOGY OIML R60		
精度等级	Accuracy class	C3	C3	
量程 (E_{max})	Maximum capacity (E_{max})	6.25, 12.5, 18.75, 25, 37.5, 62.5, 93.75, 127	10, 15, 20, 30, 50, 75, 100	kg
最大检定分度数	Max. number of LC intervals (n_{max})	3 000	3 000	d OIML
最小检定分度值	Minimum verification interval (V_{min})	1, 2, 3, 4, 6, 10, 15, 20	1, 1.5, 2, 3, 5, 7.5, 10	g
$Z=E_{max}/(2xDR)$	$Z=E_{max}/(2xDR)$	3 000	3 000	
电气性能		ELECTRICAL		
额定输入电压	Nominal range of excitation voltage	1...15		V
额定输出	Rated output, at C_n	2 ±10%		mV/V
输入/输出阻抗	Input/output resistance	410 ±15 / 350 ±5		Ω
绝缘阻抗	Insulation resistance	1 000		MΩ/50V
通用参数		GENERAL		
补偿温度范围	Compensated temperature range	-10...+40		°C
使用温度范围	Service temperature range	-20...+60		°C
安全过载	Safe load limit	150		% E_{max}
极限过载	Ultimate overload	200		% E_{max}
拧紧力矩	Tightening torque	15		Nm
防护等级	Protection class	IP65		EN 60529
材质	Material	Aluminium		
电缆长度	Cable Length	3		m
净重	Net weight	200		g

其他选项 Options

ATEX 94/9/EC version

- ⊕ II 2 G/D, Ex ia IIC T6, Ex iaD A21, T80°C Ta<+60°C (zone 1/21)
- ⊕ II 2 D, Ex tD A21, IP6X T80°C, Ta<+60°C (zone 21)
- ⊕ II 3 G, Ex nA IIC T6, Ex nL IIC T6, Ta<+60°C (zone 2)

附件 Accessories

阻尼版本 Damped version



AG Speedcell



BP501 - F 74105 Annemasse Cedex
Tél.: (+33) 4 50 87 78 64
Fax: (+33) 4 50 87 78 42
E.mail: info@scaime.com



Téléchargez tous
nos documents sur :
Download all
our documents in :
www.scaime.com

上海雅鑫比国际贸易有限公司
电话: 021-64940531
传真: 021-64940531-15
邮件: support@yaxinbi.com
网址: www.yaxinbi.com
地址: 上海市漕宝路103号14号楼703室